




XGRID PET C 0 60/60

Year of last update: 2024

Function: Reinforcement

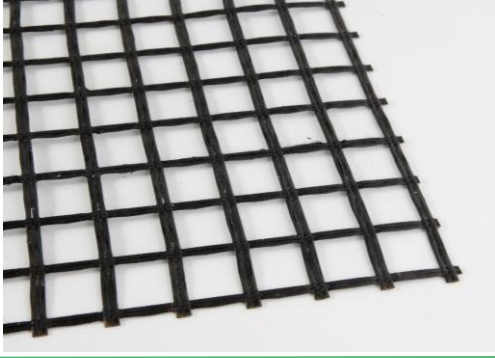

STRUCTURE: Knitted grid from high-tenacity multifilament polyester yarns with black polymeric coating which can provide best resistance of UV and durability

PROPERTIES OF RAW MATERIAL

tol

Raw material	PET
Coating	polymeric

MECHANICAL PROPERTIES

tol

Strength resistance MD - TULT	EN ISO 10319	kN/m	≥ 60	
Elongation at max load MD	EN ISO 10319	%	10	+/-2,5
Strength resistance CMD	EN ISO 10319	kN/m	≥ 60	
Elongation at max load CMD	EN ISO 10319	%	11	+/-2,5
Tensile strength MD at 2% of elongation	EN ISO 10319	kN/m	12	+/-10%
Tensile strength MD at 5% of elongation	EN ISO 10319	kN/m	25	+/-10%

TYPICAL DIMENSIONS

tol

Mesh dimensions MD/CMD	mm	29x29	+/-3
Roll width	m	4,15 - 5,25	+/-0,1
Roll length	m	100	+/-0,5

MD: Machine direction - longitudinal direction

CMD: Cross machine direction - transverse direction

Evci Mühendislik İnşaat San. Ve Tic. Ltd. Şti.

Atatürk mahallesi 35 Ada Zümrüt Sitesi Blok 9 Daire 7 Ataşehir / İstanbul

Telefon: 0216 456 72 46 - GSM: 0544 102 25 50

Faks : 0216 456 72 46

Email : devcioglu@evcimuhendislik.com - yevcioglu@evcimuhendislik.com

www.evcimuhendislik.com